READ THIS DATA SHEET CAREFULLY PRIOR TO COMMENCING ANY INSTALLATION OF LIGHT FITTINGS

Updated 251118

Fractal™ Collection Data and Installation Sheet (LED Light disk)

Materials	Cotton/Material, Stainless Steel, Steel, Paint, Acrylic
Suspension	Electronic driver, Suspension Rod, Suspension Cables, Ceiling Canopy and Electrical Flex
Dimensions	Fits into 630 Ø Circle x 300 H (mm)
Lamp Type	24V 12.5 watt LED light disk

Check lamp type for suitability with your dimming system

Installation

1 Be extremely careful when handling the pendant as materials are delicate and can scuff easily. Before removing shade from packing box, please check if shade is strapped to the base of the box. Please leave protective plastic cover on shade while preparing for installation. **DO NOT stack the shades once they are unpacked from their boxes, as the weight of the stack will damage and crush the fixture.**

2 With a qualified electrical contractor install electronic driver or transformer into ceiling, then connect ceiling canopy to the low voltage end of the driver /transformer . Connect ceiling canopy back plate to ceiling with appropriate screws. Trim suspension cable to approximate length, allowing additional length for final adjustment. Slide suspension cable through cable adjuster, located on ceiling canopy.

3 Slide canopy front plate up the flex to meet the backplate and fix with magnetic connector.. Once attached, tighten off-centre cord grip on the ceiling canopy cover securely.

4 If you need to lower or raise the pendant, unscrew top thread two to three turns on the cable adjuster, push in adjuster barrel on cable adjuster to allow cable to slide through. The suspension cable needs to be under tension and remove weight from the electrical flex, which must be slack. Please make sure adjuster cap is tightened after adjustment and trim off excess suspension cable once adjusted.

5 Do not apply force to shades or fixture and remember to remove protective plastic cover prior to turning on.

Trouble shooting : If the lamp does not turn on, please check power to the driver, check that the wires are in the correct pole, check that the dimmer is able to dim on DALI, DSI or SWITCH DIM. Check wires into light have not become loose.

Important Safety Instructions

- Please ensure all installation steps are conducted by certified electrical contractors.
- You must turn off power to fitting and allow lamp to cool down before replacing. Only switch power on once lamp is secured into lampholder.
- Keep fixture away from flammable objects or materials that may burn.
- Remove dust and insects from lamp, diffusers and surfaces regularly.

For futher information about the installation of your fitting, please refer to the Satelight installation guide at www.satelight.com.au or to any additional information withyour order.

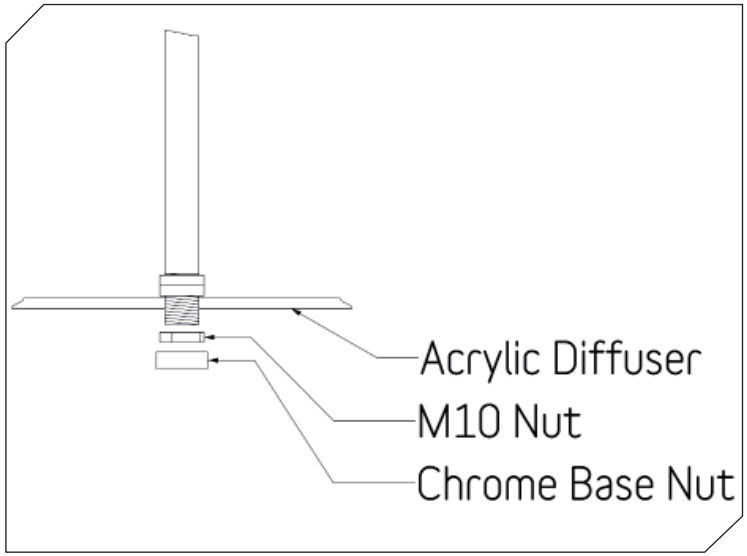

Please contact Satelight if you have any questions regarding the steps included in this data sheet.

Cleaning

- Do not use abrasive cleaning materials on fixture. Do not wipe fitting surfaces with wet cloth. Dust only.
- Please be aware that the shade materials are delicate and can scuff or mark easily.

Satelight Design Pty Ltd
www.satelight.com.au
96 Hudsons Road, Spotswood Vic 3015 Australia
Telephone +61 3 9399 5805
© Copyright Satelight Design Pty Ltd