READ THIS DATA SHEET CAREFULLY PRIOR TO COMMENCING ANY INSTALLATION OF LIGHT FITTINGS

Updated 211116

Bound™ Collection Data and Installation Sheet (3 Point ES Lamp Disk)

Materials Cotton/Material, Stainless Steel, Steel, Paint

Suspension ES E27 Lamp Disk, Suspension Cables, 120mm Dia. Low Profile Ceiling Canopy and Electrical Flex

Dimensions From 700 Ø to 1500 Ø; From 400 H to 600 H (mm)

Lamp Type **240 Volt: 3 x ES E27 Lamp**

Max. 15 Watt Compact Fluorescent / Max. 42 Watt Eco Halogen / Max. 10 Watt LED.
Check lamp type for suitability with dimming. Please ensure lamps are purchased from quality lamp manufacturers such as Philips or Osram. Low quality lamps may not perform as well.
Lamps not included. Frosted, warm colour temperature, decorative lamps recommended. To change lamps, always switch off power to light fitting, then unscrew lamp from lampholder and replace with same type. Make sure lamps are secured into lampholder prior to light operation.

Installation

1 Be extremely careful when handling the pendant shade as materials are delicate and can scuff easily. Before removing shade from packing box, please check if shade is strapped to the base of the box. Use two hands and only pick up the shade from the central wires, as the walls of the shade are very fragile and will dent easily. Please leave protective plastic cover on shade while preparing for installation.
DO NOT stack the shades once they are unpacked from their boxes, as the weight of the stack will damage and crush the fragile lampshade walls and always place shade spider DOWN if resting on a surface.

2 Trim pendant electrical flex and suspension cables to approximate length and feed through cord grip and cable holes, located on the low profile ceiling plate. The crimped ends of the suspension cables sit above the plate. Wire three core electrical flex and mains flex into ceiling bracket junction box. **Ensure both ceiling plate and pendant flex are correctly earthed to mains earth.** Once three core flex is wired, secure ceiling plate to ceiling with appropriate screws, using the various fixing holes available to suit site specific needs. Slide canopy cover plate back up flex and secure to back plate using earth magnets supplied. Ensure the cord grip on the canopy has been re-tightened after making adjustment.

3 Place shade to best conceal seamline from general view. Attach lamp disk to the inside of the shade below the central washer with wing nuts and washers supplied. Please make sure central washer and wire arms are located at the top of the fitting only. Slide stainless steel wire through cable adjusters, located on the top of the lamp disk.

4 If you need to lower or raise the pendant, unscrew top thread/nipple two to three turns on the cable adjuster, push in adjuster barrel on cable adjuster to allow cable to slide through. The suspension cables need to be under tension and remove weight from the central flex, which must be slack. Please make sure adjuster cap is tightened after adjustment and trim off excess suspension cable once adjusted. Once shade is at correct level, feed flex through off-centre plastic cord grip on lamp disk and wire three core electrical flex into lamp disk junction box.

5 If a recessed diffuser has been supplied with this pendant to be set up into the shade, insert diffuser into pendant shade, hooking the diffuser hooks over the top frame of the pendant light. Please make sure plastic is removed from diffuser prior to use.

6 Do not apply force to shades or fixture and remember to remove protective plastic cover prior to turning on.

Important Safety Instructions

- Please ensure all installation steps are conducted by certified electrical contractors.
- Lit lamps are extremely hot! Use switch or plug when turning light fitting on or off.
- You must turn off power to fitting and allow lamp to cool down before replacing. Only switch power on once lamp is secured into lampholder.
- Keep fixture away from flammable objects or materials that may burn.
- Remove dust and insects from lamp and surfaces regularly.

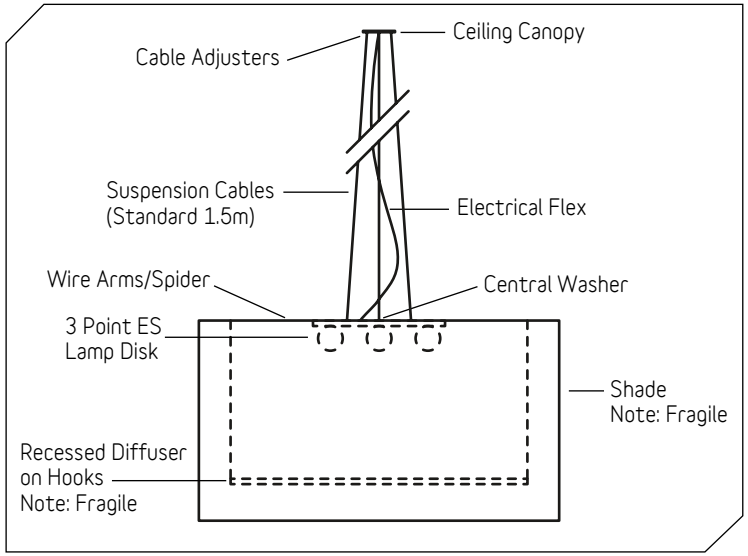

Please contact Satelight if you have any questions regarding the steps included in this data sheet. As this luminaire can be customised, installation details may vary from this standard data sheet. Install in conjunction with your delivery docket.

Cleaning
- Do not use abrasive cleaning materials on fixture. Do not wipe fitting surfaces with wet cloth. Dust only.
- Please be aware that the shade materials are delicate and can scuff or mark easily.

Satelight Design Pty Ltd
www.satelight.com.au
96 Hudsons Road, Spotswood Vic 3015 Australia
Telephone +61 3 9399 5805
© Copyright Satelight Design Pty Ltd

Installation - Suspension Ceiling Canopy - 3 Suspension Cables/Wires

L2

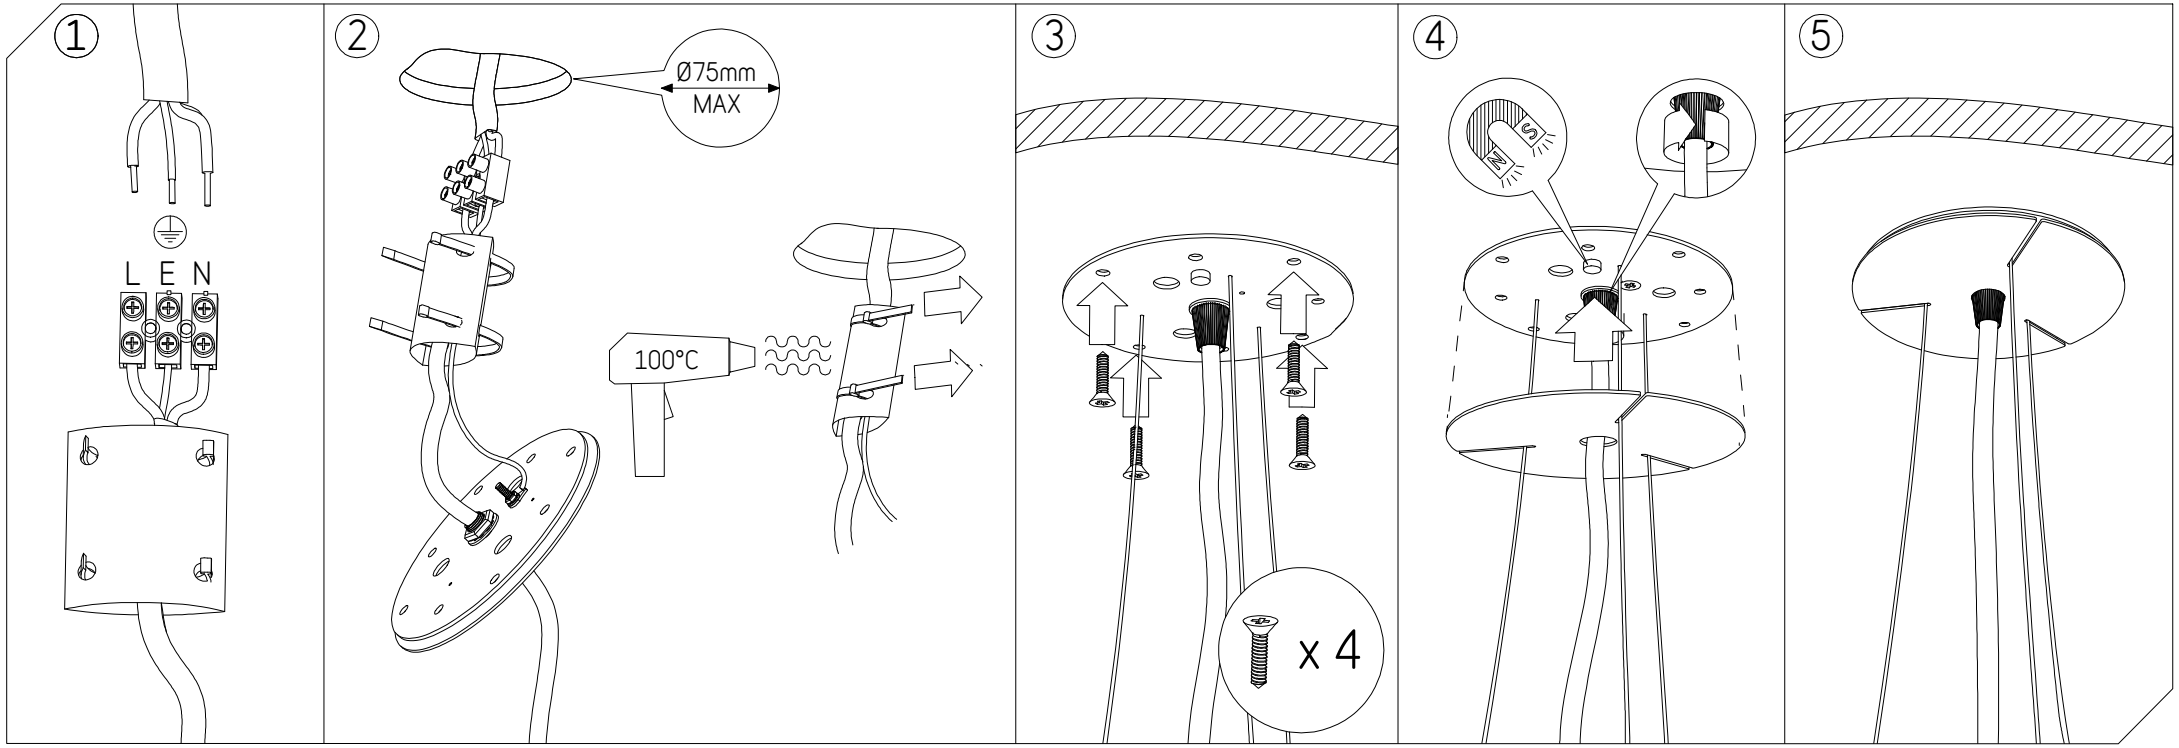

Must be installed by certified electrical contractors only

Clean with dry cloth only.

Satelight Design Pty Ltd
www.satelight.com.au
96 Hudsons Road, Spotswood Vic 3015 Australia
Telephone +61 3 9399 5805

© Copyright Satelight Design Pty Ltd

Installation - 3 Point Light Disk

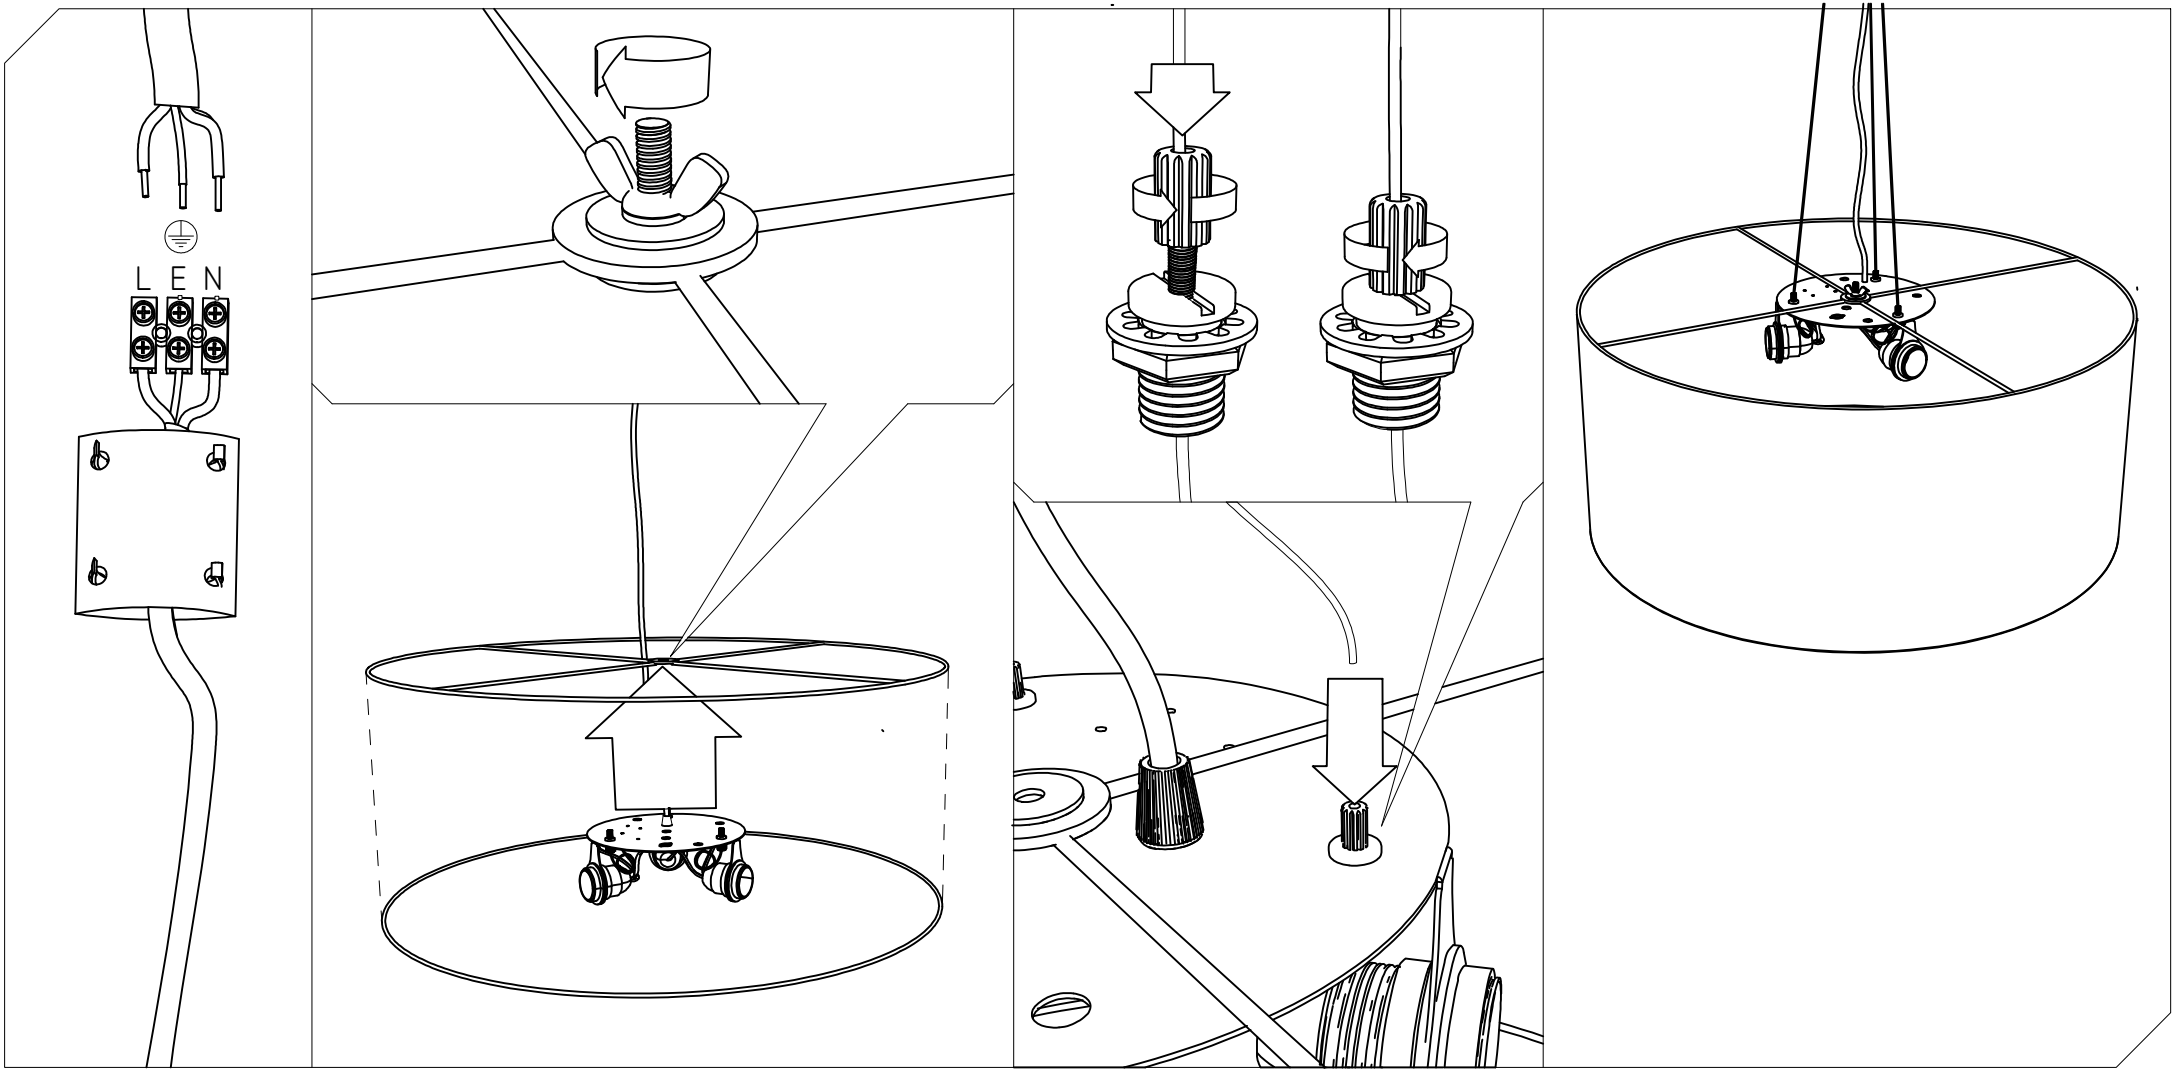

Must be installed by certified electrical contractors only

Clean with dry cloth only.

Satelight Design Pty Ltd
www.satelight.com.au
96 Hudsons Road, Spotswood Vic 3015 Australia
Telephone +61 3 9399 5805

© Copyright Satelight Design Pty Ltd

READ THIS DATA SHEET CAREFULLY PRIOR TO COMMENCING ANY INSTALLATION OF LIGHT FITTINGS

Updated 211116

Bound$_{tm}$ Collection Data and Installation Sheet (C8: LED Lamp Disk)

Materials Cotton/Material, Stainless Steel, Steel, Paint

Suspension LED Lamp Disk, Suspension Cables, Low Priofile Ceiling Plate and Electrical Flex

Dimensions From 600 Ø to 1000 Ø; From 300 H to 400 H (mm)

Lamp Type **1 x LED 34 Watt Disk ONLY.**
Check lamp type for suitability with dimming with which ever system has been specified. Please ensure replacement lamps are purchased from quality lamp manufacturers such as Tridonic Atco. Low quality lamps may not perform as well and may not be compatible. To change LED disk, always switch off power to light fitting AT THE MAINS, unscrew bolts from fixing points and replace with same type LED lamp disk. **Warning: Ensure work and light fitting area is free of static prior to installation. Disk MUST only be serviced by certified electrical contractor.**

Installation

1 Be extremely careful when handling the pendant shade as materials are delicate and can scuff easily. Before removing shade from packing box, please check if shade is strapped to the base of the box. Use two hands and only pick up the shade from the central wires, as the walls of the shade are very fragile and will dent easily. Please leave protective plastic cover on shade while preparing for installation.
DO NOT stack the shades once they are unpacked from their boxes, as the weight of the stack will damage and crush the fragile lampshade walls and always place shade spider DOWN if resting on a surface.

2 Using the Satelight cut-out template, cut out hole in ceiling to allow for LED driver to be placed into ceiling cavity. Connect 5 Core or 3 Core electrical flex from mains into LED Driver. (5 Core for Dimmable / 3 Core for Non-Dimmable.)

3 Trim pendant flex to approximate length required, allowing some length for final adjustment and feed through ceiling canopy plate and cover plate. Slide stainless steel cables through back plate so that the crimped ends are above the back plate. Once in place, attach lamp disk to shade using supplied wing nut and washer assembly. Attach suspension cables through cable adjusters, located around the outer edge of the LED Lamp Disk.

4 Once fed through, with two people, one to hold the pendant lampshade in place, wire pendant flex into LED Driver. Taking careful note of the (+) and (-) terminals. Once wired, attach cord grip onto driver and position in cavity.

5 Install ceiling canopy back plate over hole in ceiling with appropriate screws. Slide decorative cover plate up flex and onto base plate using supplied magnets. The slots in the decorative plate allow for the suspension cables to pitch to their required position below.

6 If you need to lower or raise the pendant, unscrew top thread/nipple two to three turns on the cable adjuster, push in adjuster barrel on cable adjuster to allow cable to slide through. The suspension cables need to be under tension and remove weight from the central flex, which must be slack. Please make sure adjuster cap is tightened after adjustment and trim off excess suspension cable once adjusted.

7 Position Icarus diffuser inside pendant so that the two magnets locate onto shade spider in two even positions. Ensure diffuser is sitting evenly inside shade and is centered arond the LED lamp disk.

8 Do not apply force to shades or fixture and remember to remove protective plastic cover prior to turning on.

Important Safety Instructions

- Please ensure all installation steps are conducted by certified electrical contractors.
- Lit lamps are extremely hot! Use switch or plug when turning light fitting on or off.
- You must turn off power to fitting and allow lamp to cool down before replacing. Only switch power on once lamp is secured into lampholder.
- Keep fixture away from flammable objects or materials that may burn.
- Remove dust and insects from lamp and surfaces regularly.

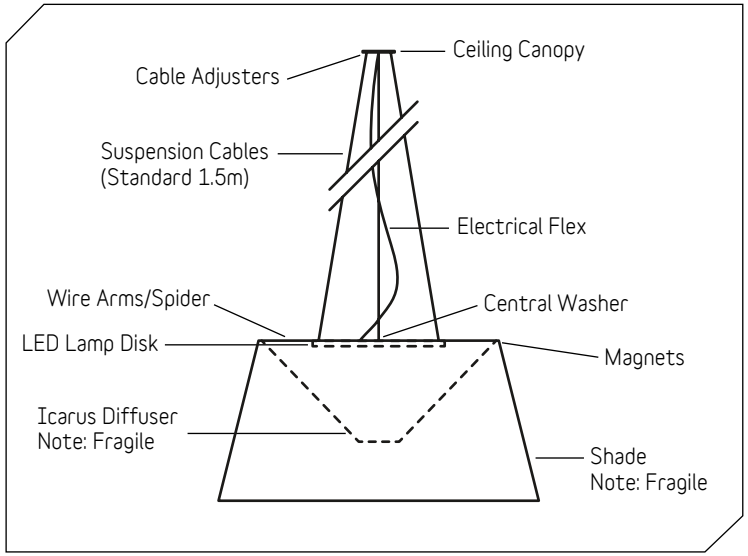

Please contact Satelight if you have any questions regarding the steps included in this data sheet. As this luminaire can be customised, installation details may vary from this standard data sheet. Install in conjunction with your delivery docket.

Cleaning
- Do not use abrasive cleaning materials on fixture. Do not wipe fitting surfaces with wet cloth. Dust only.
- Please be aware that the shade materials are delicate and can scuff or mark easily.

Satelight Design Pty Ltd
www.satelight.com.au
96 Hudsons Road, Spotswood Vic 3015 Australia
Telephone +61 3 9399 5805
© Copyright Satelight Design Pty Ltd

Installation - Suspension Ceiling Canopy - 3 Suspension Cables/Wires

L2

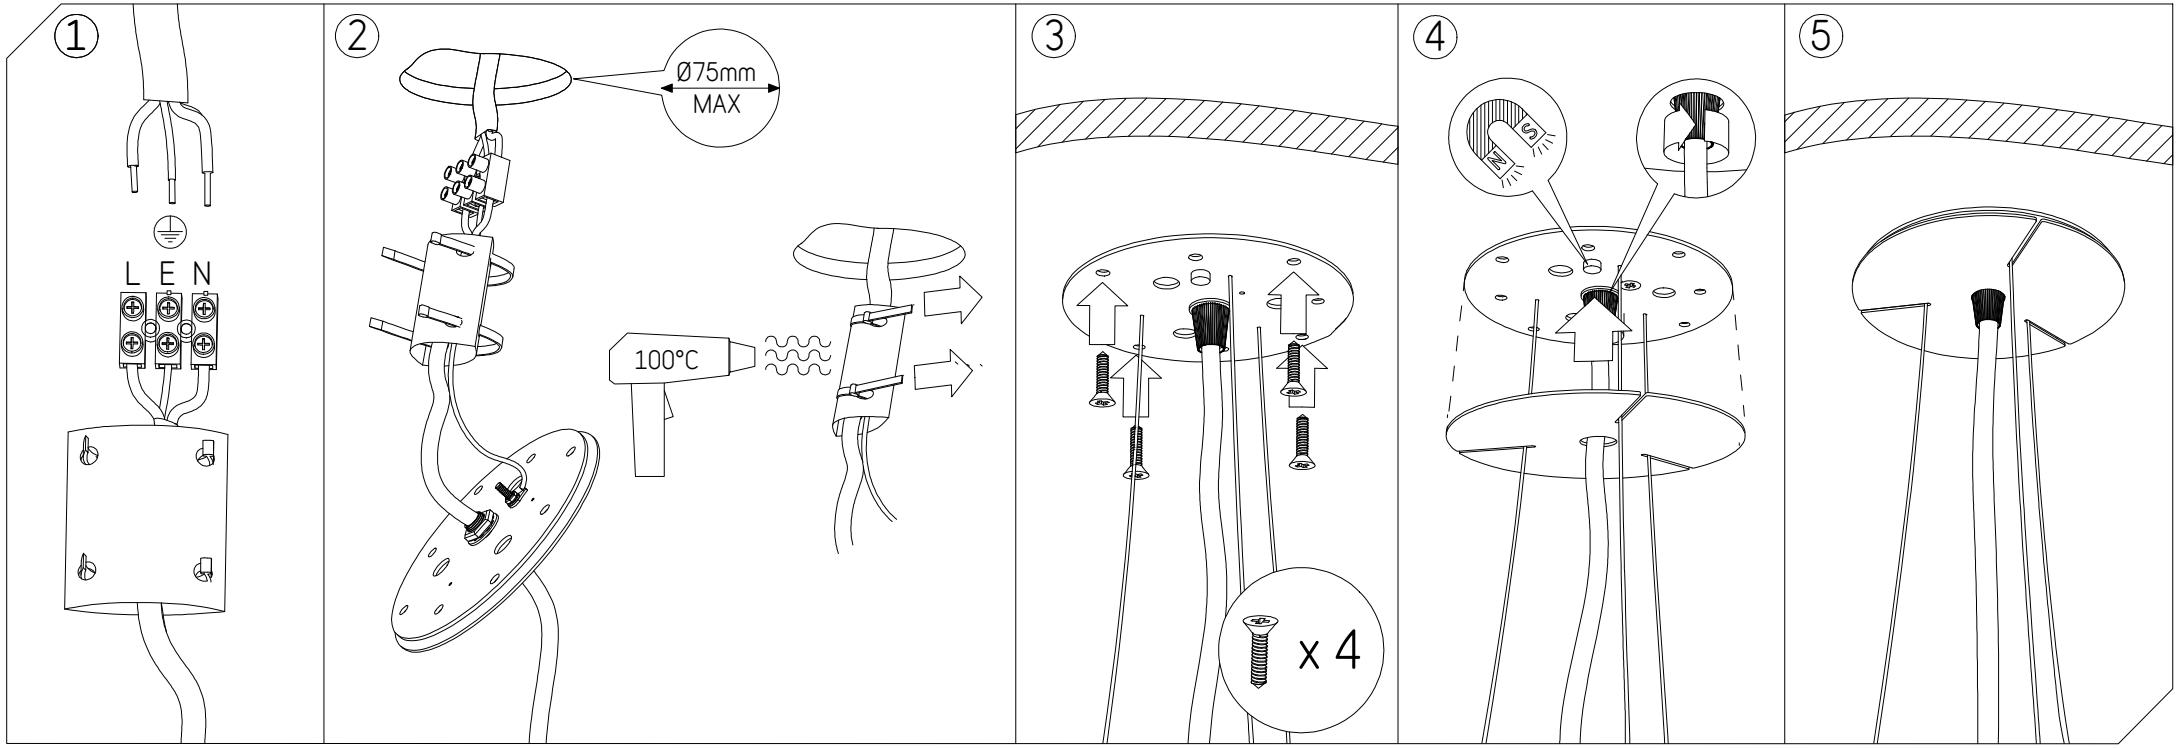

Must be installed by certified electrical contractors only

Clean with dry cloth only.

Satelight Design Pty Ltd
www.satelight.com.au
96 Hudsons Road, Spotswood Vic 3015 Australia
Telephone +61 3 9399 5805

© Copyright Satelight Design Pty Ltd