



### PRODUCT OVERVIEW:

|   |   |
|---|---|
| Product Description:  | Aëon Illumination Aria LED extrusion profile 76 mm x 95 mm with integrated LED control gear                     |
| Finish Options:   | Anodised<br>Powdercoat: Black/White<br>Other colours available upon request                                     |
| Diffuser Options:   | Plexiglas diffuser<br>Low brightness louvre   |
| Mounting Options:   | Wire suspended<br>Rod suspended<br>Wall mounted<br>Ceiling mounted<br>Recessed with trim (plasterboard bracket) |
| Light Source:   | LED boards (Zhaga Compliant)<br>3000K, 4000K<br>CRI 80+, 90+ available  |
| Lumen Maintenance:  | 50,000hrs to 70%  |
| Driver Dimming Options:   | Fixed output/ DSI/ Dali/ SwitchDIM  |
| Luminous Efficacy:  | Up to 98.2 Lm/W   |
| Luminous Flux Range:  | 920 to 5100 Lm/m  |
| Power Consumption Range:  | 10.4 to 66.6 W/m  |
| Lumen Packages / Metre:<br>(more packages available upon request) | 1200 Lm 13.0 W<br>1600 Lm 17.8 W<br>2000 Lm 20.9 W<br>2400 Lm 25.5 W<br>2800 Lm 30.3 W                          |
| Ambient Operating Temp:   | ta 0°C to 45°C  |

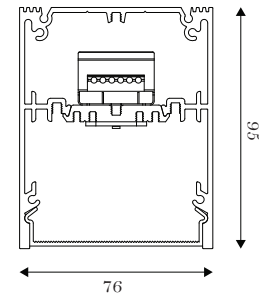


**Aria LED**  
Luminaire weight approx. 3.2 kg/m

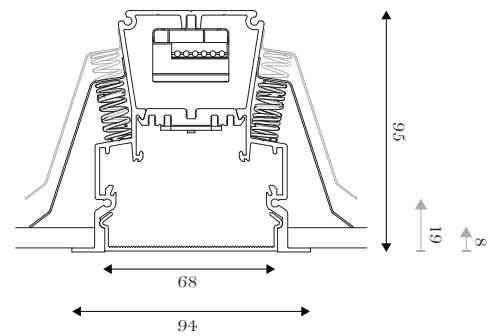


**Recessed Aria LED**  
Luminaire weight approx. 3.2 kg/m  
Cutout approx. 12mm shorter and narrower than overall length and width of luminaire

### PHOTOMETRIC DATA:

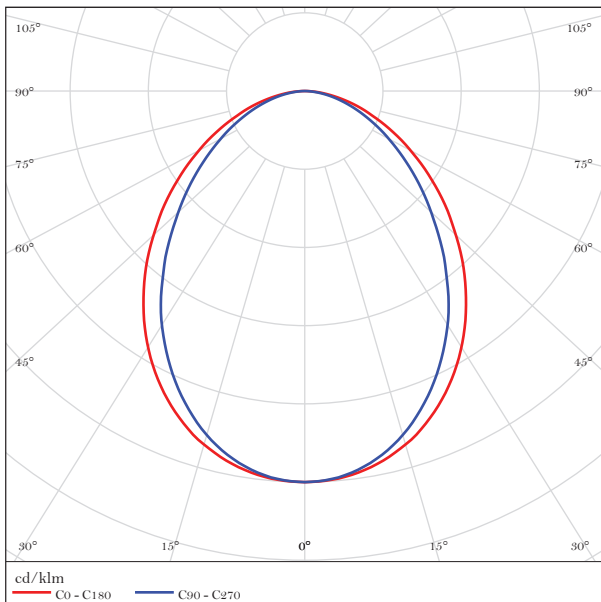

Aria LED

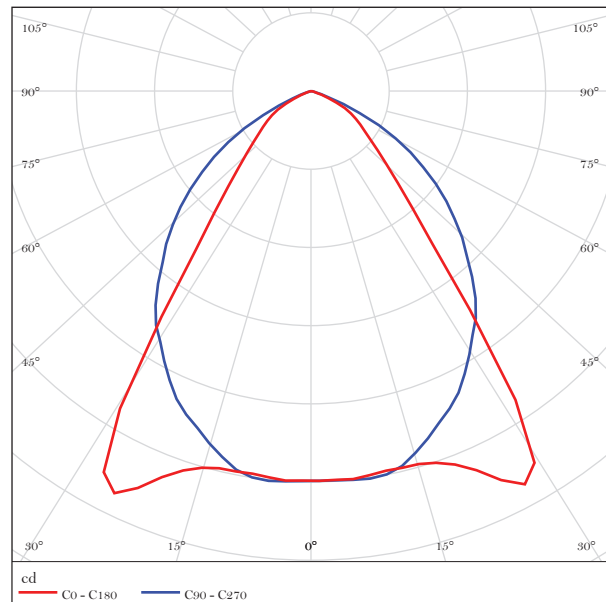

Aria LED with Louvre