



PRODUCT OVERVIEW:

Product Description:	Aëon Illumination Vesi LED extrusion profile range with IP rating and integrated LED control gear
IP rating:	44/ 55
Finish Options:	Anodised Powdercoat: Black/White Other colours available upon request
Diffuser Options:	PlexiGlas diffuser
Mounting Options:	Wire suspended Wall mounted Ceiling mounted Recessed with trim (plasterboard bracket)
Light Source:	LED boards (Zhaga Compliant) 3000K, 4000K CRI 80+, 90+ available
Lumen Maintenance:	50,000hrs to 70%
Driver Dimming Options:	Fixed output/ DSI/ Dali/ SwitchDIM
Luminous Efficacy:	Up to 98.2 Lm/W
Luminous Flux Range:	920 to 5100 Lm/m
Power Consumption Range:	10.4 to 66.6 W/m
Lumen Packages / Metre: (more packages available upon request)	1200 Lm 13.0 W 1600 Lm 17.8 W 2000 Lm 20.9 W 2400 Lm 25.5 W 2800 Lm 30.3 W
Ambient Operating Temp:	ta 0°C to 45°C
Restrictions:	Maximum length of 3.4m including endcaps; 6mm x 2 for Vesi, 12mm x 2 for Vesi Recessed

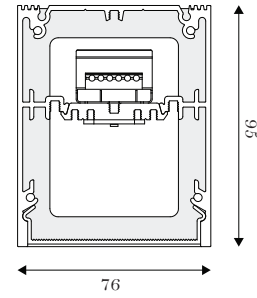

Vesi LED
Luminaire weight approx. 3.2 kg/m

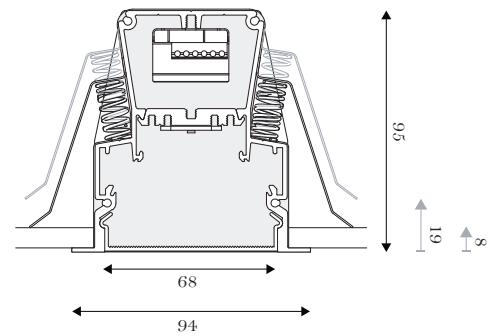

Recessed Vesi LED
Luminaire weight approx. 3.2 kg/m
Cutout approx. 12mm shorter and narrower than overall length and width of luminaire

PHOTOMETRIC DATA:

