

## Acorn Collection Data and Installation Sheet

Materials	Spun metal, steel, paint
Suspension	Single ES E27 Lampholder, suspension cables, ceiling canopy and electrical flex
Dimensions	204 x 215 H (mm)
Lamp Type	24V 5W

### Installation

- 1 Be extremely careful when handling the pendant shade as materials are delicate and can scuff easily. Before removing shade from packing box, please check if shade is strapped to the base of the box. Use two hands and leave protective palstic cover on shade while preparing for installation.  
DO NOT stack the shades once they are unpacked from their boxes, as the weight of the stack will damage the shade walls.
- 2 Slide low profile canopy cover plate down flex. Trim electrical flex and suspension cable to approximate length and feed through cord grip and mains flex into ceiling bracket junction box. Ensure ceiling plate is correctly earthed to mains earth. Once three core flex is wired, secure ceiling plate to ceiling with appropriate screws using various fixing holes available to suit sire specific needs. Slide canopy cover plate back up flex and secure to back plate using earth magnets supplied. Ensure the cord grip and cable adjuster on canopy has been re-tightened and making adjustment.
- 3 With twp people (one to hold the pandant in place), wire in three core electrical flex to ceiling bracket terminal block. Ensure ceiling bracket and pendant electrical flex are correctly earthed to mains earth. Slide canopy up the flex to meet the bracket and fix with metal screws on the side of the canopy. Once attached, tighten central cord grip on the ceiling canopy cover securely.
- 4 If you need to lower or raise the pendant, unscrew top thread two to three turns on the cable adjuster, push in adjuster barrel on cable adjuster to allow cable to slide through. The suspension cable needs to be under tension and remove weight from central flex, which must be slack.
- 5 Please make sure adjuster cap is tightened after adjustment and trim off excess suspension cable once adjusted. DO NOT apply force to shade or fixture and remember to remove protective plastic cover priot to turning on.

### Important Safety Instructions

- Please ensure all installation steps are conducted by certified electrical contractors.
- Lit lamps are extremely hot! Use switch or plug when turning light fitting on or off.
- You must turn off power to fitting and allow lamp to cool down before replacing. Only switch power on once lamp is secured intp lampholder.
- Keep fixture away from flammable objects or materials that may burn.
- Remove dust and insects from lamp and surface regularly.




Please contact Satelight if you have any questions regarding the steps included in this data sheet.


Cleaning - Do not use abrasive cleaning materials on fixture. Do not wipe fitting surfaces with wet cloth.  
Dust only  
- Please be aware that the shade materials and delicate and can scuff or mark easily.



# Installation - Suspension Ceiling Canopy

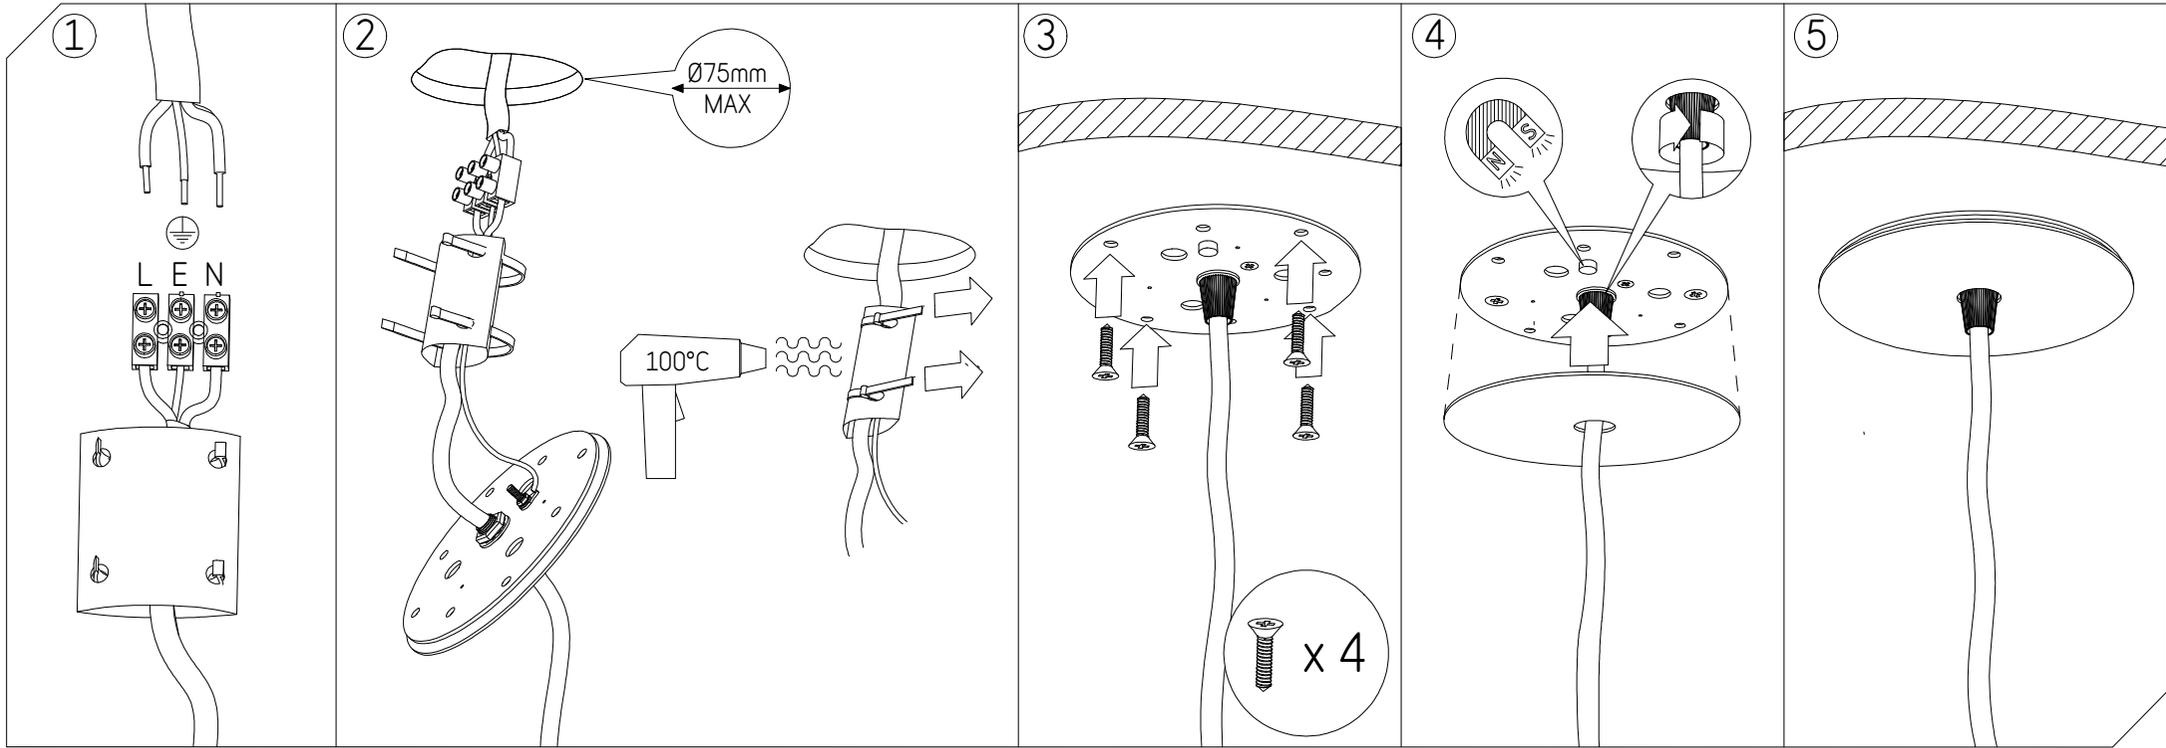

Must be installed by certified electrical contractors only



Clean with dry cloth only.

